



Head Office

PMA/TOOLS AG

Siemensring 42
47877 Willich/Germany
Tel.: +49 2154 922230
Fax: +49 2154 922255
E-mail: info@pma-tools.de
www.pma-tools.de

Subsidiaries

PMA/TOOLS FRANCE


Z.A.-214, rue de la Warnave
59850 Nieppe
Tél.: +33 320 970249
Fax: +33 320 326140
E-mail: info@pma-tools.fr
www.pma-tools.fr

PMA/TOOLS ESPAÑA

Sta. Margarida de Boada Vell 7-9
P.I. Riera de Caldes, Nave 12
08184 Palau-solità i
Plegamans (BCN)
Tel.: +34 93 8648517
Fax: +34 93 8640020
E-mail: info@pma-tools.es
www.pma-tools.es



SensorTack®

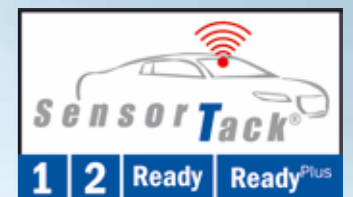

Innovative. **Sensor repair systems**
for all requirements.



Perfect. Solutions that set new quality standards.



__Often when removing sensors from the windscreen, the silicone layer becomes damaged due to it adhering to the glass surface. When this happens, the sensor cannot be re-used and in many cases, an expensive replacement is needed. It was for this reason that PMA/TOOLS developed SensorTack®, a range of products that enable the easy repair of sensors.

SensorTack® - provides:

- >> Innovative patented* technology for great results.
- >> Consistent material properties for ease of processing.
- >> Simple and quick to use – increases your efficiencies.
- >> TÜV certification** your guarantee of high quality.



* SensorTack® 1
 ** SensorTack® 1 and SensorTack® 2

__Customers in over 100 countries worldwide rely on our proven sensor repair systems. As your partner for automotive glass accessories and a leading supplier of sensor technology, we have now completed the SensorTack® range that covers virtually all of the international demand for silicone pads for rain/light sensors. You can be confident of quality products Made in Germany.

__Choose SensorTack® products today and enhance your profitability through improved efficiency. No more purchasing of expensive replacement sensors or pads!



SensorTack® 1

Soft 2-component gel: TÜV certified technology with verifiable OEM standard quality producing highly transparent silicone pads. For the cost-effective repair of round rain/light sensors. Constant material properties between -40 °C and +180 °C. Minimum curing time, maximum form stability.




SensorTack® 2

Solid 2-component gel, TÜV certified. Developed for producing translucent square-type, non fade rain/light sensor pads when used in conjunction with special shaped refill moulds. High quality materials ensure no shrinking of the pad during the rapid curing process.



SensorTack® Ready

Ready-to-go sensor pads made of silicone. For the immediate and quick re-use of rain/light sensors (transparent or translucent subject to vehicle model type requirements). Highly elastic, non-stick and bubble-free application – faster and simpler to use than conventional acrylic products. Immune to dust, grease and finger prints. Ideal for mobile fitting.

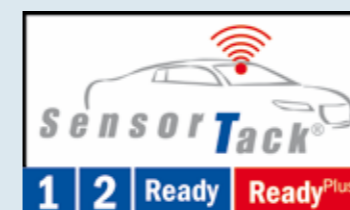

SensorTack® Ready Plus

Our unique combination of SensorTack® Ready silicone pads and SensorTack®1 refill gel with two components. Precisely balanced for the repair of those square-type sensors with raised features. Repair completed quickly and efficiently and ready to go!



Tipp: For the best results in conditions up to -15 °C and to maintain a constant reaction time of our 2-component products, always use our **SensorTack® heating box.**